

550,918

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 October 2004 (07.10.2004)


PCT

(10) International Publication Number
WO 2004/085114 A1

- (51) International Patent Classification⁷: **B24B 23/03**, 7/18, 41/047, 47/12
- (74) Agent: **GILL JENNINGS & EVERY**; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).
- (21) International Application Number: PCT/GB2003/001376
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 28 March 2003 (28.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **THE TECHNOLOGY PARTNERSHIP PLC** [GB/GB]; Melbourne Science Park, Cambridge Road, Melbourn, Royston, Hertfordshire SG8 6EE (GB).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **RAWLINS, Phillip, John** [GB/GB]; 50 Long Reach Road, Chesterton, Cambridge CB4 1UJ (GB). **CARR, Matthew, John** [GB/GB]; 19 Bermuda Road, Cambridge CB4 3JX (GB).
- Published:
— with international search report

[Continued on next page]

(54) Title: ROTARY WORK TOOL WITH ORBITING PLANETARY GEARS CONTAINING ECCENTRIC AXES FOR THE ATTACHMENT OF POLISHING OR SANDING PLATENS

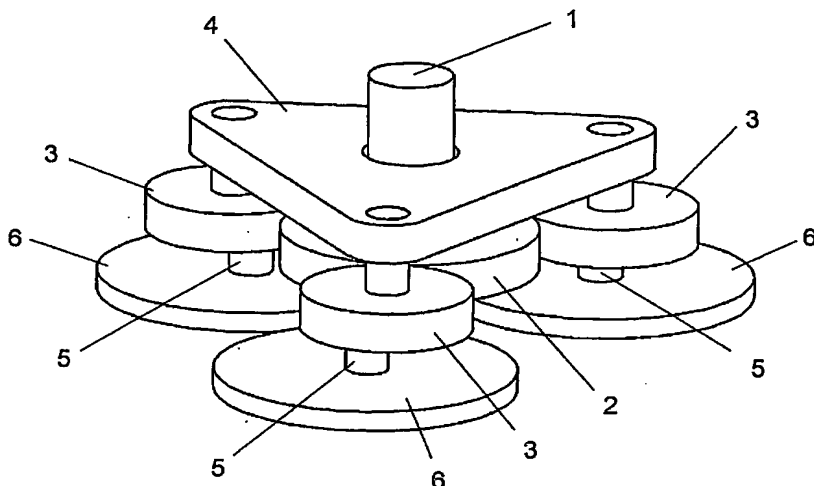

(57) Abstract: A work tool comprising: a principle drive shaft (1) with a sun gear (2) attached thereto; at least two planetary gears (3) distributed about the circumference of the sun gear (2) at substantially equal angular separations; and a carriage (4) for constraining the planetary gears (3) such that they maintain their angular separation about the axis of the principal drive shaft (1); wherein each planetary gear (3) has an eccentric (5) axis in addition to its rotational axis constrained by the carriage (4), such that each planetary gear (3) can drive, in use, a polishing or sanding platen (6) around the respective eccentric axis (5). A phase difference may be provided between the respective adjacent eccentric axes (5). The polishing or sanding platens (6) may rotate freely or may be rotationally constrained.

WO 2004/085114 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WORKTOOL

This invention relates to worktools and, in particular, rotating worktools, such as sanders and polishing machines, that engage with a surface.

5 Known orbital and random-orbital worktools, such as sanders, functioned by driving an abrasive surface in a circular path about a principal drive shaft. A surface may be of fixed orientation or may be free to rotate about an eccentric axis, according to whether the resulting motion is required to be orbital or random-orbital respectively. Such worktools typically suffer from vibration. Vibration in such systems has two distinct
10 components, dynamic (which results from unbalanced centripetal acceleration) and frictional (which results from the translating frictional forces between the working surface of the tool and the work piece).

Dynamic imbalance can normally be corrected by distributing counter weights at particular axial, radial and phase positions on the drive axis of the work tool. However,
15 this approach relies on the working surface of the tool, such as the sanding platen and any attached replacement component, being of constant mass. This means that changing the platen or replacing the working material can often cause unwanted vibration.

Vibration experienced in use also often arises from translating frictional forces between the abrasive surface acting so as to make the eccentric drive axis the centre of
20 rotation. In the worst case, these vibrations can be of an amplitude equal to the shaft eccentricity, in the case that the principal drive shaft orbits the stationary eccentric shaft.

Frictional vibration increases with increasing contact force, resulting in a reduction of sanding efficiency that tends to zero as the amplitude of vibration tends to the eccentricity of the drive axis. A common misconception is that, by increasing the contact
25 force, an increase in the material removal rate can be achieved. As such, counter-intuitive system behaviour in prior art solutions often results in poor sanding efficiency and high levels of vibration.

The present invention aims to reduce markedly vibration arising from translating frictional forces, by ensuring that such forces are reacted within a system of sanding
30 surfaces, thereby increasing the sanding efficiency and the rate of material removal that can be achieved.

According to the present invention, there is provided a work tool comprising: a principal drive shaft with a sun gear attached thereto; at least two planetary gears distributed about the circumference of the sun gear at substantially equal angular
35 separation; and a carriage for constraining the planetary gears such that they maintain their angular separation about the axis of the principal drive shaft, wherein each planetary gear has an eccentric axis in addition to its rotational axis constrained by the carriage,

such that each planetary gear can drive, in use, a platen around the respective eccentric axis.

The phase difference between the rotation of the eccentric axis of any two adjacent planetary gears about the respective rotation of axis is $2\pi/n$ radians, wherein n equals the number of planetary gears. n is preferably greater than or equal to 3. This relationship ensures that the centre of mass of the combined system does not depart from the principal axis of rotation.

In addition to the net linear frictional forces, the frictional force from each of the platens will produce a moment about the centre of the tool (centre of the sun gear). Furthermore, as the planetary gear rotates, the direction and position of the force changes, so the magnitude of the resulting moment will change. If these forces were unopposed, then the resulting varying moment would be transmitted to the user, as a torsional vibration. In order to preserve the dynamic balance of the system and to ensure that this component is cancelled in addition to the dynamic and linear friction forces, it is advantageous to define not only the magnitude of the eccentricity phase relationship between adjacent platens but also the relative direction of that phase relationship.

It is preferable that the rotation of the eccentric axis of a first planetary gear about its associated rotational axis has a phase difference in a clockwise direction of $2\pi/N$ relative to the rotation of the eccentric axis of a second planetary gear about its associated rotational axis, the second planetary gear being adjacent the first planetary gear in a clockwise direction.

According to a second aspect of the present invention, there is provided a worktool comprising: a principal drive shaft with a sun gear attached thereto; n planetary gears distributed about the circumference of the sun gear at substantially equal angular separation; and a carriage for constraining the planetary gears such that they maintain their angular separation about the axis of the principal drive shaft; wherein each planetary gear has an eccentric axis in addition to its rotational axis constrained by the carriage, such that each planetary gear can drive, in use, a platen around the respective eccentric axis, and wherein the rotation of the eccentric axis of a first planetary gear about its associated rotational axis has a phase difference in a clockwise direction of $2\pi/n$ relative to the rotation of the eccentric axis of a second planetary gear about its associated rotational axis, the second planetary gear being adjacent to the first planetary gear in a clockwise direction.

With the present invention, since the translating frictional forces are mutually reacted, vibration transmitted to the user is, in principle, decoupled from the applied contact force. Similarly, sanding efficiency is not unduly compromised by increasing

contact force, permitting higher rates of material removal. Such a feature of the present invention complements user initiation, unlike the prior art systems described above.

Furthermore, the arrangement of sanding elements is dynamically balanced, removing the need for the system of counter weights, in conventional sanders. The sanding platens and abrasive surfaces can also be replaced without unduly compromising the dynamic balance. The present invention can be configured to be operable in a number of modes, optimising the motion for a given sanding operation or spatial constraint.

The platens may be freely rotating or partially constrained from rotating with respect to the carriage, thereby fixing the orientation of the platens with respect to one another. Partially constraining the platens in this way permits the use of tessellating platen configurations.

The worktool may be a sander or a polisher. The principal drive shaft may be connected, optionally through an additional gear mechanism, to an electric motor.

Examples of the present invention will now be described with reference to the accompanying drawings, in which:

Figures 1 and 2 are isometric and plan views of a worktool according to the present invention;

Figure 3 is a plan view of a device according to the present invention, with an additional gear shown;

Figure 4 is a plan view showing alternative configurations of the platen only; and

Figure 5 shows the phase relationship between the rotation of the eccentric axis in a preferred example of the present invention.

Referring to Figures 1 and 2, the worktool includes a principal drive shaft 1 and a carriage 4 to which a sun gear 2 is attached. The worktool is typically a sander or polisher. A number of planetary gears 3 are distributed about the circumference of the sun gear 2 at equal angular separations. The planetary gears 3 are constrained by the carriage 4, locating the centres and maintaining the angular separation about the principal axis of the drive shaft 1. Each planetary gear 3 has an eccentric axis 5, in addition to the centre of rotation constrained by the carriage 4, driving a freely rotated or partially rotationally constrained platen 6.

If the platens are partially constrained from rotating, then alternative tessellating platen configurations are possible. Some examples of such configurations are shown in Figure 4 in which each of the platens 8 or 9 can be attached to a respective eccentric axis 5, instead of the circular platen 6 shown in Figure 1. Alternatively, in an embodiment that employs four planetary gears 3, a rectangular platen 10 can be attached to each of the respective eccentric axis 5.

When free to rotate, the carriage 4 will be driven by a net torque between the sanding surfaces and the workpiece (not shown) causing the sanding centres to describe a distorted epicycloid where the number of rotations of the respective planetary gear is not purely a function of the sun/planetary gear ratio. This is a random motion most suited to finishing applications.

If the carriage 4 is prevented from rotating, preferably with a user engaged lock, the platens 6 will orbit a fixed centre, with no bulk rotation of the combined system. This constitutes a mode of operation suitable for sanding an inside corner that would be inaccessible by an equivalent single sanding platen of an area equal to the sum of the platen areas.

Figure 3 shows an optional additional gear 7 including inwardly facing teeth (not shown) which engage with each of the planetary gears. The gear 7 is concentric with the principal drive axis 1. When this additional gear 7 is free to rotate, the above modes are accessible. However, when prevented from rotating, again preferably with a user engaged lock, the platen centres will be driven in a strictly epicyclic motion. This results in higher surface to surface speeds and a corresponding increase in the rate of material removal.

Figure 5 shows a simplified plan view of a preferred embodiment showing the particular phase relationship between the rotation of the eccentric axis on each of the planetary gears.

The orientation of the eccentricity on each gear with respect to the centre of the gear is indicated by arrows 10A, 10B and 10C. If planetary gear 3A is arbitrarily selected as the reference gear then it can be seen that its eccentric axis 5A is currently orientated such that the arrow 10A is nominally horizontal. Proceeding in a clockwise direction around the sun gear 2 to gear 3D can be seen that the eccentric axis 5B is arranged such that it is rotated by $2\pi/3$ radians in a counter clockwise direction with respect to the eccentricity on gear 3A. Exactly the same relationship is true between gear 3C and 3B and between gear 3A and 3C.

If this relationship is maintained then the variable component of the resulting moments from each of the platens will cancel each other out, ensuring that there is no torsional vibration transmitted to the user. This is true for any number of gears greater than or equal to three.

CLAIMS

1. A worktool comprising:
5 a principle drive shaft with a sun gear attached thereto;
at least two planetary gears distributed about the circumference of the sun gear
at substantially equal angular separations; and
a carriage for constraining the planetary gears such that they maintain their
angular separation about the axis of the principal drive shaft; wherein
10 each planetary gear has an eccentric axis in addition to its rotational axis
constrained by the carriage, such that each planetary gear can drive, in use, a platen
around the respective eccentric axis.
2. A work tool according to claim 1, wherein the phase difference between the
15 rotation of the eccentric axis of any two adjacent planetary gears about the respective
rotational axis is $2\pi/n$ radians, wherein n equals the number of planetary gears.
3. A work tool according to claim 2, wherein the rotation of the eccentric axis of a first
planetary gear about its rotational axis has a phase difference in a clockwise direction of
20 $2\pi/n$ relative to the rotation of the eccentric axis of a second planetary gear about its
associated rotational axis, the second planetary gear being adjacent the first planetary
gear in a clockwise direction.
4. A work tool comprising:
25 a principal drive shaft with a sun gear attached thereto;
 n planetary gears distributed about the circumference of the sun gear at
substantially equal angular separation; and
a carriage for constraining the planetary gears such that they maintain their
angular separation about the axis of the principal drive shaft; wherein
30 each planetary gear has an eccentric axis in addition to its rotational axis
constrained by the carriage, such that each planetary gear can drive, in use, a platen
around the respective eccentric axis, and wherein
the rotation of the eccentric axis of a first planetary gear about its associated
rotational axis has a phase difference in a clockwise direction of $2\pi/n$ relative to the
35 rotation of the eccentric axis of a second planetary gear about its associated rotational
axis, the second planetary gear being adjacent to the first planetary gear in a clockwise
direction.

5. A work tool according to any one of the preceding claims, wherein the principal drive shaft is connected to a motor.
6. A work tool according to any one of the preceding claims, wherein the platens can rotate freely.
7. A work tool according to any one of claims 1 to 5, wherein the platens are partially rotationally constrained.
8. A work tool according to any one of the preceding claims, arranged to be a polisher.
9. A work tool according to any one of claims 1 to 7, arranged to be a sander.

15

1/5

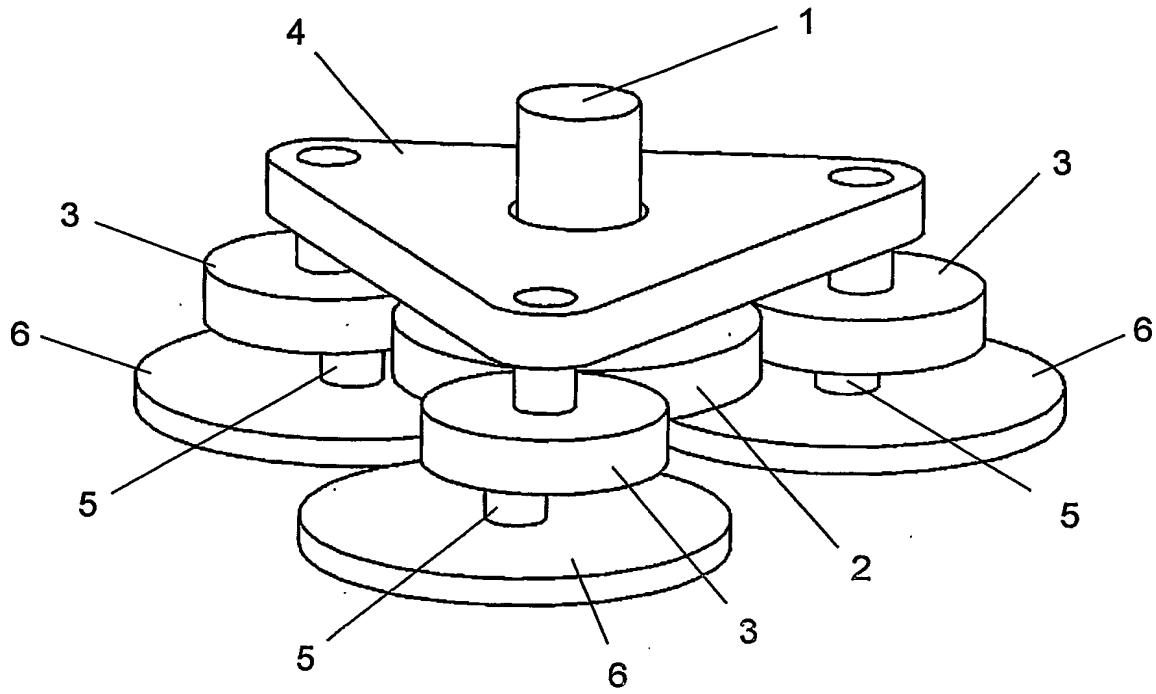


Figure 1

2/5

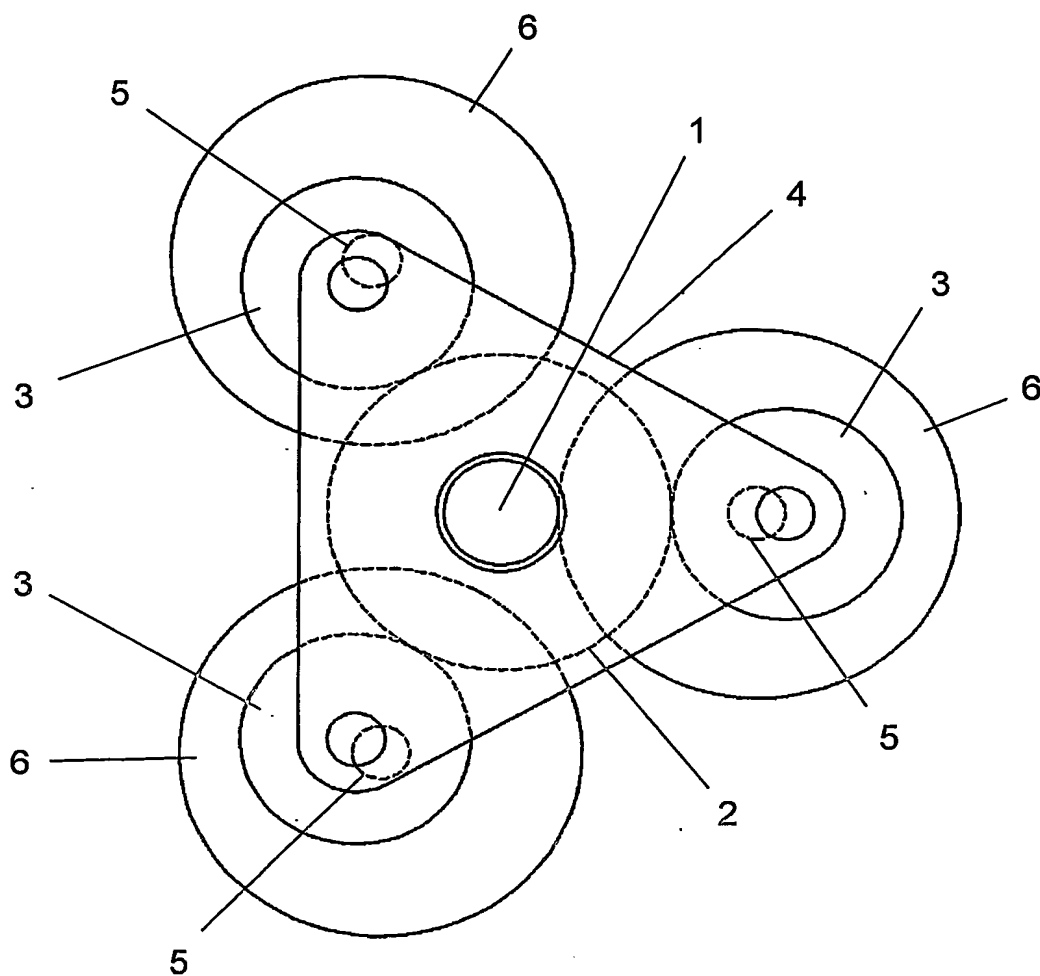


Figure 2

3/5

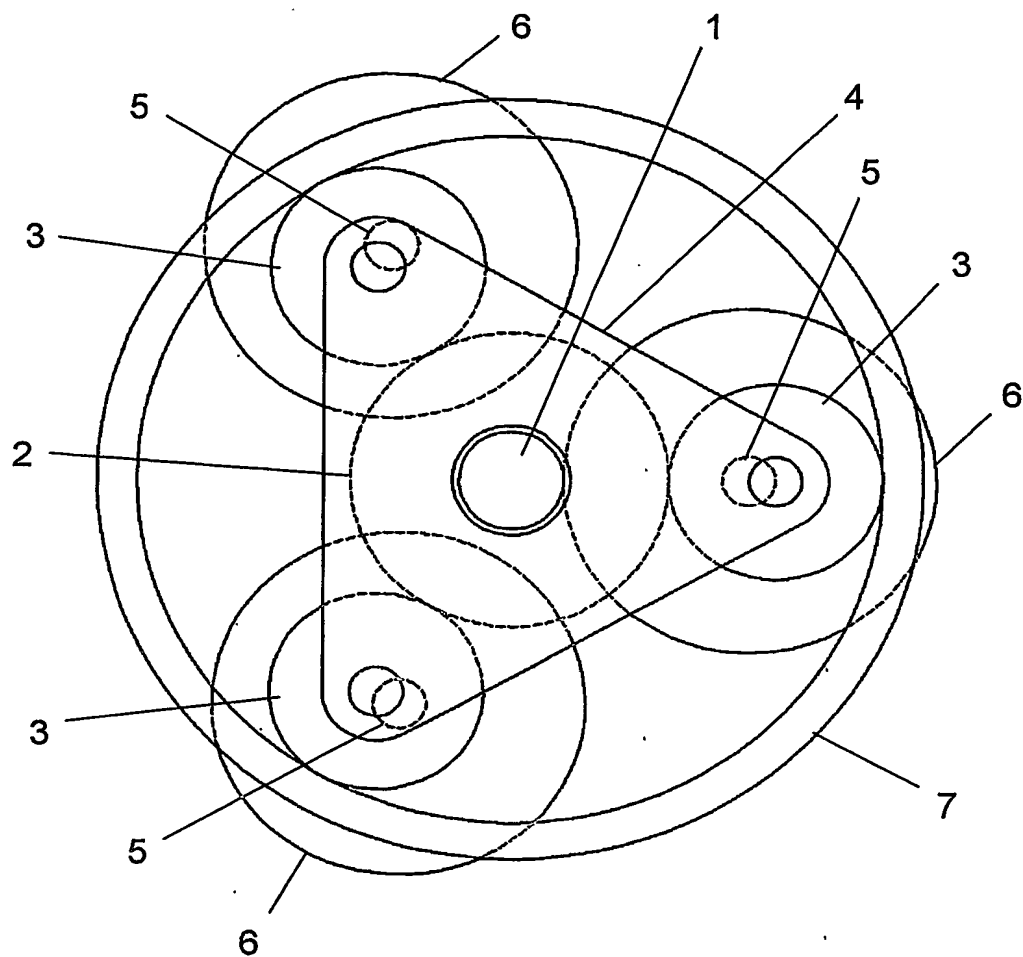


Figure 3

4/5

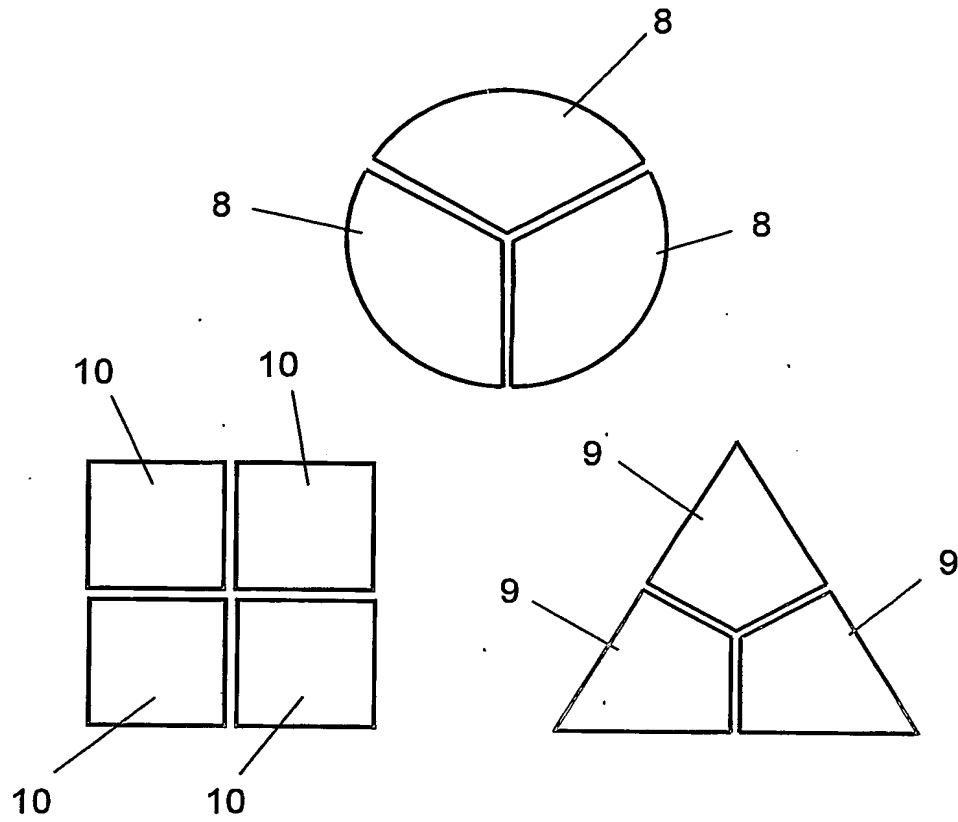


Figure 4

5/5

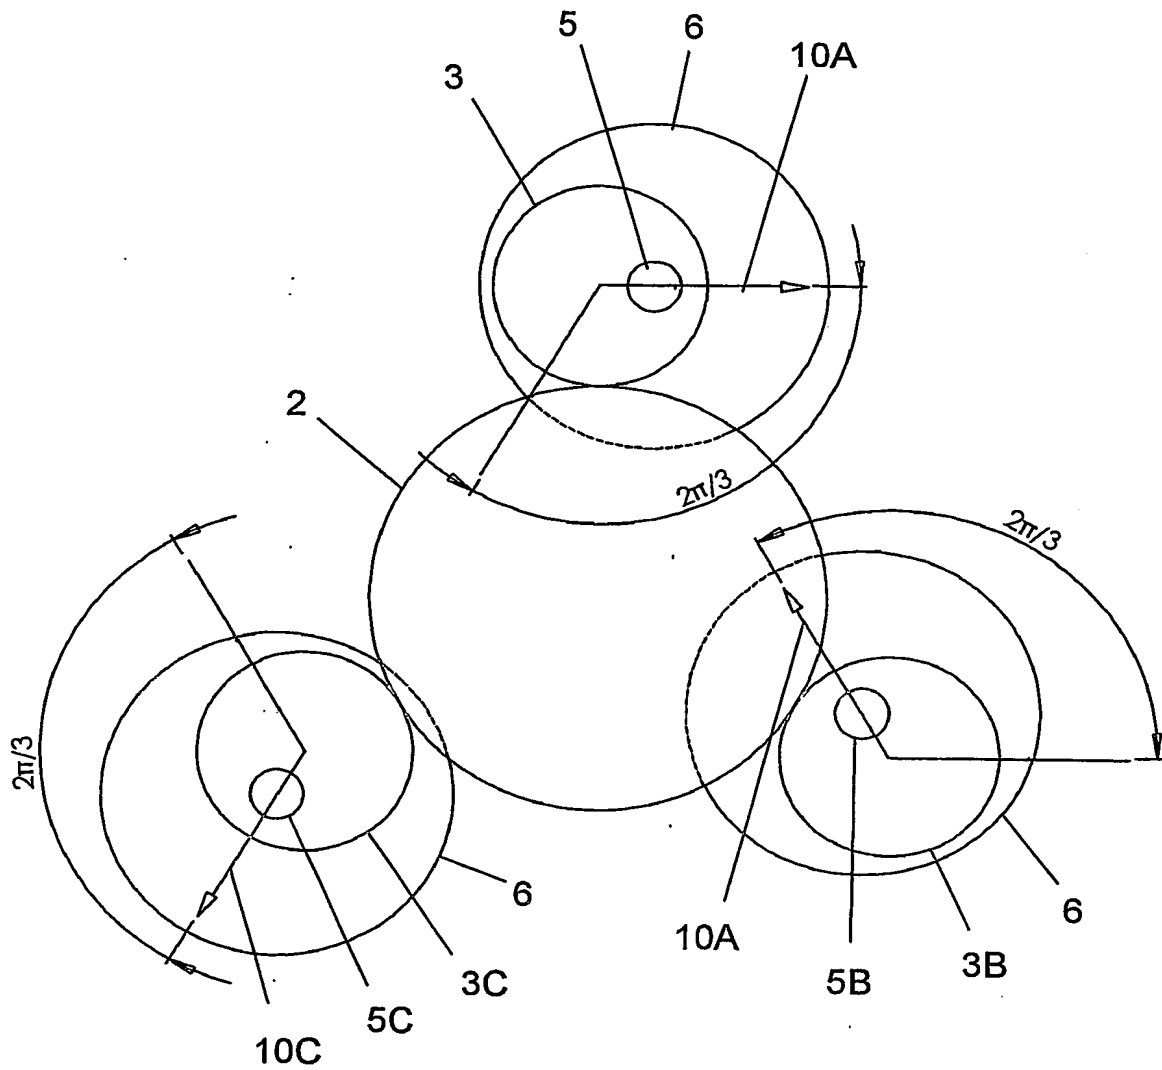


Figure 5

INTERNATIONAL SEARCH REPORT

Interr .pplication No
PCT/GB 03/01376

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B24B23/03 B24B7/18 B24B41/047 B24B47/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 1 430 214 A (WILLIAM D SAWYER) 26 September 1922 (1922-09-26) page 1, left-hand column, line 6 - line 7 page 1, left-hand column, line 19 - line 27 figure 3	1-9
E	EP 1 300 218 A (TECHNOLOGY PARTNERSHIP) 9 April 2003 (2003-04-09) the whole document	1-9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

16 June 2003

Date of mailing of the international search report

09/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Eder, R

INTERNATIONAL SEARCH REPORT

Intern application No

PCT/GB 03/01376

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2 759 305 A (HELBIG JIM D) 21 August 1956 (1956-08-21) column 1, line 15-17 column 1, line 26 - line 46 column 2, line 3 - line 16 column 2, line 40 - line 45 column 3, line 20 - line 28 column 4, line 18 - line 22 column 4, line 38 - line 42 column 5, line 11 - line 19 column 6, line 24 - line 41 column 7, line 3 - line 18 column 7, line 57 - column 8, line 18 column 8, line 62 - column 9, line 3 figures 3,4,6,9 ----	1-9
Y	DE 11 58 674 B (MAUZ & PFEIFFER) 5 December 1963 (1963-12-05) column 1, line 4 - line 9 column 1, line 36 - line 43 ----	1-9
A	DE 930 948 C (MUELLER BRUETSCH & CO ZUERICH) 28 July 1955 (1955-07-28) the whole document ----	1-9
A	CH 237 159 A (BUEHLER AG GEB) 15 April 1945 (1945-04-15) the whole document -----	1-9

INTERNATIONAL SEARCH REPORT

Intern: Application No
PCT/GB 03/01376

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 1430214	A	26-09-1922	NONE	
EP 1300218	A	09-04-2003	EP 1300218 A1 US 2003064670 A1	09-04-2003 03-04-2003
US 2759305	A	21-08-1956	NONE	
DE 1158674	B	05-12-1963	NONE	
DE 930948	C	28-07-1955	CH 268486 A	31-05-1950
CH 237159	A	15-04-1945	NONE	